




|                                  |                                                                |
|----------------------------------|----------------------------------------------------------------|
| <b>Type</b>                      | <b>CLD30-12-8027-DD</b>                                        |
| Order No                         | CLD30-12-8027-DD                                               |
| Lamp type/assembly               | Pendant luminaire                                              |
| Size                             | Ø ~480 mm                                                      |
| Light source                     | LED                                                            |
| Colour temperature               | 2700 K                                                         |
| Colour rendering index           | CRI > 80                                                       |
| Chromaticity tolerance (initial  | 3 SDCM                                                         |
| MacAdam)                         |                                                                |
| Operating mode                   | Dimmable DALI/Touchdim/On-Off                                  |
| Operation                        | On site                                                        |
| Ballast (number)                 | DALI converter (1), integrated in luminaire                    |
| Lamp shade                       | Polyester fleece                                               |
| Suspension (number of suspension | 1                                                              |
| points)                          |                                                                |
| Ceiling rose                     | White, Ø 123 mm                                                |
| Power cable                      | Transparent, 5 x 0.75mm <sup>2</sup> , L 5500 mm               |
| Light distribution               | Diffuse                                                        |
| Total luminous flux of luminaire | 2900 lm @ 3000 K                                               |
| Power consumption                | 37 W                                                           |
| Luminaire efficacy               | 78 lm/W @ 3000 K                                               |
| LED service life                 | 50 000 h (L80/F10)                                             |
| Mains voltage                    | 220-240V, 50Hz                                                 |
| Stand-by consumption             | < 0.5W                                                         |
| Safety class                     | I                                                              |
| Protection type                  | IP 20                                                          |
| Packaging units                  | 1 (470 x 420 x 400 mm)                                         |
| Weight                           | 1.5 kg                                                         |
| Tooltip Description              | The fairweather cloud made from stable and mouldable material. |
| Guarantee                        | 36 months                                                      |

**Belux AG**

Neufeldweg 6, CH-5103  
Möriken  
Tel. +41 61 316 74 01  
Fax +41 61 316 75 99  
www.belux.com  
belux@belux.com

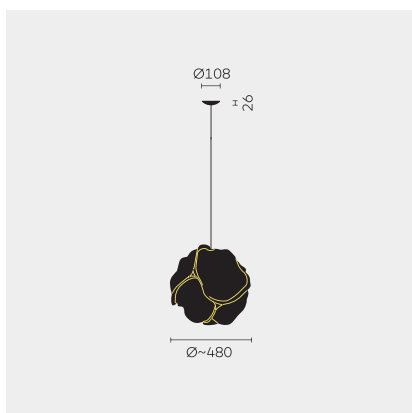