




Type	CLD30-12-8040-DD
Order No	CLD30-12-8040-DD
Lamp type/assembly	Pendant luminaire
Size	Ø ~480 mm
Light source	LED
Colour temperature	4000 K
Colour rendering index	CRI > 80
Chromaticity tolerance (initial	3 SDCM
MacAdam)	
Operating mode	Dimmable DALI/Touchdim/On-Off
Operation	On site
Ballast (number)	DALI converter (1), integrated in luminaire
Lamp shade	Polyester fleece
Suspension (number of suspension	1
points)	
Ceiling rose	White, Ø 123 mm
Power cable	Transparent, 5 x 0.75mm ² , L 5500 mm
Light distribution	Diffuse
Total luminous flux of luminaire	2900 lm @ 3000 K
Power consumption	37 W
Luminaire efficacy	78 lm/W @ 3000 K
LED service life	50 000 h (L80/F10)
Mains voltage	220-240V, 50Hz
Stand-by consumption	< 0.5W
Safety class	I
Protection type	IP 20
Packaging units	1 (470 x 420 x 400 mm)
Weight	1.5 kg
Tooltip Description	The fairweather cloud made from stable and mouldable material.
Guarantee	36 months

Belux AG

Neufeldweg 6, CH-5103
Möriken
Tel. +41 61 316 74 01
Fax +41 61 316 75 99
www.belux.com
belux@belux.com

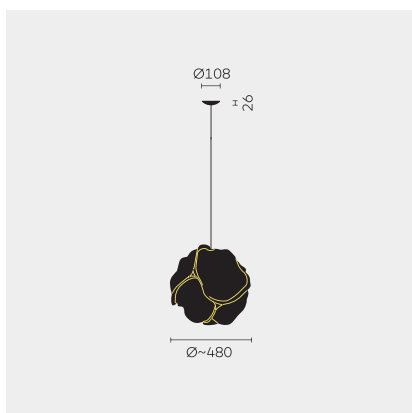