




|                                          |                                                                |
|------------------------------------------|----------------------------------------------------------------|
| <b>Type</b>                              | <b>CLD36-12-8030-DD</b>                                        |
| Order No                                 | CLD36-12-8030-DD                                               |
| Lamp type/assembly                       | Pendant luminaire                                              |
| Size                                     | Ø ~650 mm                                                      |
| Light source                             | LED                                                            |
| Colour temperature                       | 3000 K                                                         |
| Colour rendering index                   | CRI > 80                                                       |
| Chromaticity tolerance (initial          | 3 SDCM                                                         |
| MacAdam)                                 |                                                                |
| Operating mode                           | Dimmable DALI/Touchdim/On-Off                                  |
| Operation                                | On site                                                        |
| Ballast (number)                         | DALI converter (1), integrated in luminaire                    |
| Lamp shade                               | Polyester fleece                                               |
| Suspension (number of suspension points) | 1                                                              |
| Ceiling rose                             | White, Ø 123 mm                                                |
| Power cable                              | Transparent, 5 x 0.75mm <sup>2</sup> , L 5500 mm               |
| Light distribution                       | Diffuse                                                        |
| Total luminous flux of luminaire         | 2900 lm @ 3000 K                                               |
| Power consumption                        | 37 W                                                           |
| Luminaire efficacy                       | 78 lm/W @ 3000 K                                               |
| LED service life                         | 50 000 h (L80/F10)                                             |
| Mains voltage                            | 220-240V, 50Hz                                                 |
| Stand-by consumption                     | < 0.5W                                                         |
| Safety class                             | I                                                              |
| Protection type                          | IP 20                                                          |
| Packaging units                          | 1 (470 x 420 x 400 mm)                                         |
| Weight                                   | 2.3 kg                                                         |
| Tooltip Description                      | The fairweather cloud made from stable and mouldable material. |
| Guarantee                                | 36 months                                                      |

**Belux AG**

Neufeldweg 6, CH-5103  
Möriken  
Tel. +41 61 316 74 01  
Fax +41 61 316 75 99  
www.belux.com  
belux@belux.com

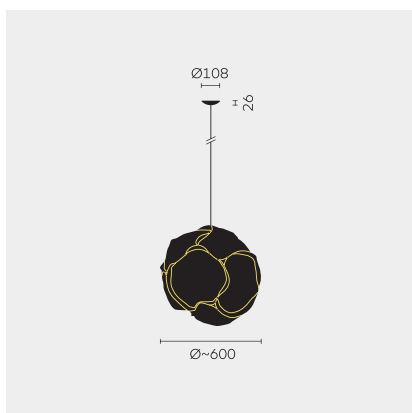