

# Elle 1

design Tommaso Cimini, 1984

release 2019, December



Floor lamp for direct and indirect lighting with single pivotable arm. The head can rotate 180° and is provided with a screen grid for glare control. Equipped with a foot on-off and dimmer switch.

## Finishing

### Standard

● Black soft touch  
cod. 61L01ST00

○ Matt white  
cod. 61L02OP00

● Brushed nickel  
cod. 61L4400

### Special

● Metallic bronze  
cod. 61L29MT00

All RAL coating and galvanic finishes available upon request

## Light emission

- Light emission: diffuse
- Light direction: downlight, uplight
- Light source: 2 led boards
- Source flux: 3980 lm
- Emitted flux: 2346 lm
- Efficacy: 49 lm/W
- UGR: < 19
- CCT: 3000K
- CRI index: 97
- Lifetime: >55000h L80 @ 25°C

## Electrical Facts



- Source power: 45 W
- Power absorption: 48 W
- Stand-by absorption: < 1 W
- Grid voltage: 100-240V AC/50-60 Hz (EU/UK plug equipped)
- Power supply: internal AC-DC converter provided
- Dimmability: on-wire foot dimmer switch
- Energy class: A++

## Technical data

- Environment: indoor
- Placement: floor
- Net weight: 6,8 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: II
- Protection class: IP20

Packaging  
cardboard box  
211 x 33 x 13 (cm)  
0,127 m<sup>3</sup>

Gross weight  
9,3 Kg

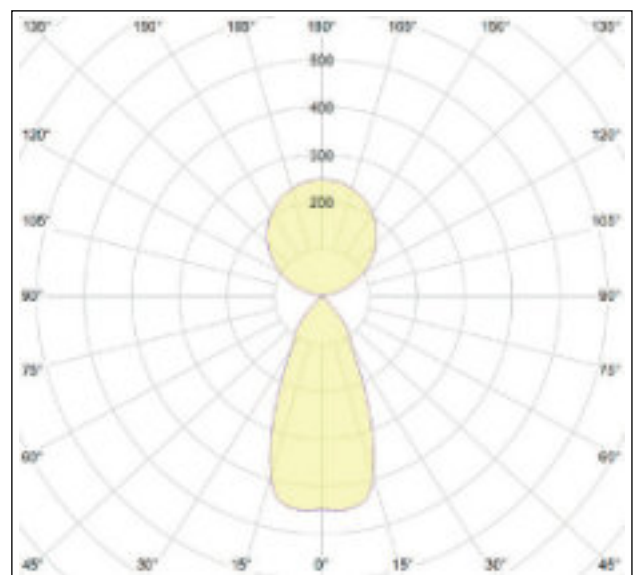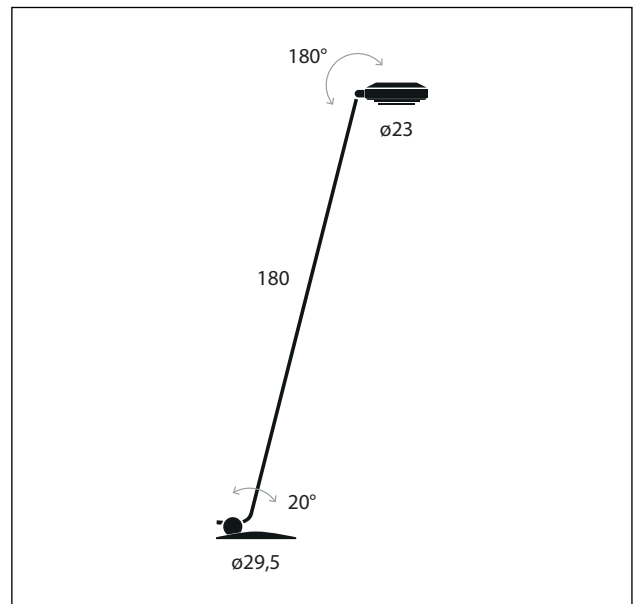

# Elle 1

design Tommaso Cimini, 1984

release 2019, December



Floor lamp for direct and indirect lighting with single pivotable arm. The head can rotate 180° and is provided with a screen grid for glare control. Equipped with a foot on-off and dimmer switch.

## Finishing

### Standard

● Black soft touch  
cod. 61L01STK27

○ Matt white  
cod. 61L02OPK27

● Brushed nickel  
cod. 61L44K27

### Special

● Metallic bronze  
cod. 61L29MTK27

All RAL coating and galvanic finishes available upon request

## Light emission

- Light emission: diffuse
- Light direction: downlight, uplight
- Light source: 2 led boards
- Source flux: 3600 lm
- Emitted flux: 2280 lm
- Efficacy: 47,5 lm/W
- UGR: < 19
- CCT: 2700K
- CRI index: 97
- Lifetime: >55000h L80 @ 25°C

## Electrical Facts



- Source power: 45 W
- Power absorption: 48 W
- Stand-by absorption: < 1 W
- Grid voltage: 100-240V AC/50-60 Hz (EU/UK plug equipped)
- Power supply: internal AC-DC converter provided
- Dimmability: on-wire foot dimmer switch
- Energy class: A++

## Technical data

- Environment: indoor
- Placement: floor
- Net weight: 6,8 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: II
- Protection class: IP20

Packaging  
cardboard box  
211 x 33 x 13 (cm)  
0,127 m<sup>3</sup>

Gross weight  
9,3 Kg

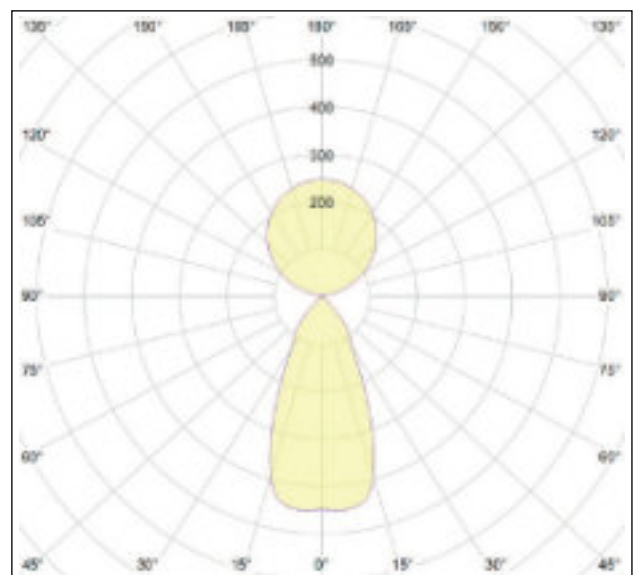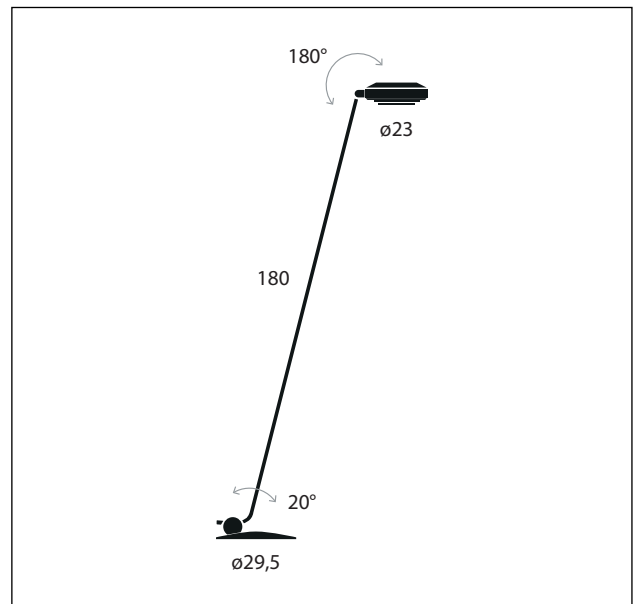



Floor lamp for direct and indirect lighting with single pivotable arm. The head can rotate 180° and is provided with a screen grid for glare control. Equipped with a foot on-off and dimmer switch.

Finishing

Standard

● Black soft touch  
cod. 60L01ST00

○ Matt white  
cod. 60L02OP00

● Brushed nickel  
cod. 60L4400

Special

● Metallic bronze  
cod. 60L29MT00

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: downlight, uplight
- Light source: 2 led boards
- Source flux: 3980 lm
- Emitted flux: 2346 lm
- Efficacy: 49 lm/W
- UGR: < 19
- CCT: 3000K
- CRI index: 97
- Lifetime: >55000h L80 @ 25°C

Electrical Facts



- Source power: 45 W
- Power absorption: 48 W
- Stand-by absorption: < 1 W
- Grid voltage: 100-240V AC/50-60 Hz (EU/UK plug equipped)
- Power supply: internal AC-DC converter provided
- Dimmability: on-wire foot dimmer switch
- Energy class: A++

Technical data

- Environment: indoor
- Placement: floor
- Net weight: 14,4 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: II
- Protection class: IP20

Packaging  
cardboard box  
211x33x13 + 40x40x10  
cm 0,127 m<sup>3</sup> + 0,018 m<sup>3</sup>

Gross weight  
5,6 Kg + 13 Kg

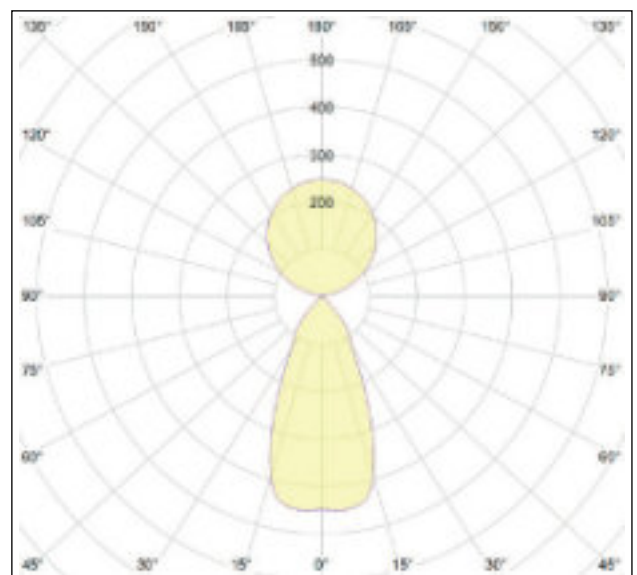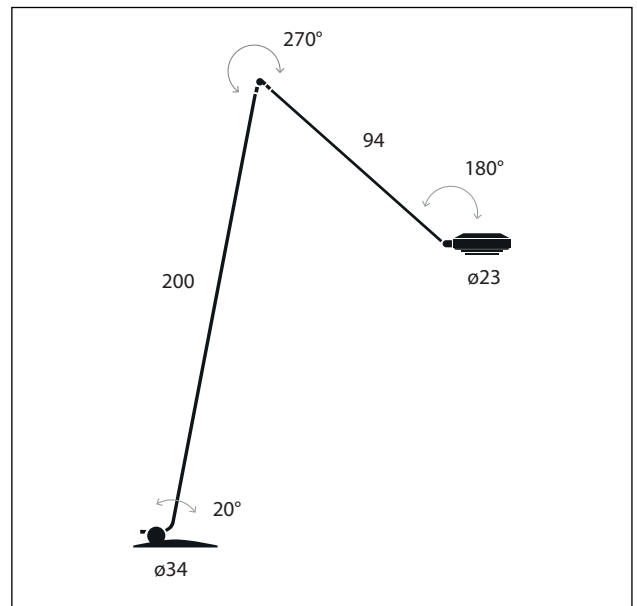



Floor lamp for direct and indirect lighting with single pivotable arm. The head can rotate 180° and is provided with a screen grid for glare control. Equipped with a foot on-off and dimmer switch.

Finishing

Standard

● Black soft touch  
cod. 60L01STK27

○ Matt white  
cod. 60L02OPK27

● Brushed nickel  
cod. 60L44K27

Special

● Metallic bronze  
cod. 60L29MTK27

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: downlight, uplight
- Light source: 2 led boards
- Source flux: 3600 lm
- Emitted flux: 2280 lm
- Efficacy: 47,5 lm/W
- UGR: < 19
- CCT: 2700K
- CRI index: 97
- Lifetime: >55000h L80 @ 25°C

Electrical Facts

- Source power: 45 W
- Power absorption: 48 W
- Stand-by absorption: < 1 W
- Grid voltage: 100-240V AC/50-60 Hz (EU/UK plug equipped)
- Power supply: internal AC-DC converter provided
- Dimmability: on-wire foot dimmer switch
- Energy class: A++

Technical data

- Environment: indoor
- Placement: floor
- Net weight: 14,4 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: II
- Protection class: IP20

Packaging  
cardboard box  
211×33×13 + 40×40×10  
cm 0,127 m<sup>3</sup> + 0,018 m<sup>3</sup>

Gross weight  
5,6 Kg + 13 Kg

