



A mono-material table with a monochromatic finish.

The important technological innovation it incorporates, combined with the tensioning capacity of the components, makes it possible to build tabletops in large sizes which remain perfectly flat and also extremely light.

#### Frame and tabletops

A table available in two versions:

- **Mono-material finish** in matt white, made of acrylic resin and rock minerals.

Tabletop, edges and legs covered with a 3mm thick sheet of resin.

- **Monochromatic finish** in matt black and turtledove acrylic resin and EXTRA MATT high-pressure stratified laminate of the latest generation.

Tabletop in stratified laminate with mass colouration; edges and legs in acrylic resin and rock minerals.

The 35mm thick tabletop is a load-bearing composite board built with an internal frame consisting of either aluminium profiles and polystyrene filler (mono-material version), or an acrylic resin honeycomb and two outer layers of aluminium (monochromatic version).

35x35mm steel legs with internal structural tie.

The acrylic resin coating is in the same matt colours as the tabletop.

#### Dimensions

The table is available in 24 sizes, height 73cm. The turtledove or black version can reach the maximum size of 120x400cm due to the technical limits of the materials employed to build the tabletops.

#### Accessories

The table is also available in a version equipped with 1 or 2 openings and an undertop tray. The openings in size 350 or 420mm are in aluminium.

A steel spring can be inserted into the pre-drilled holes (every 50cm) at the bottom of the undertop tray to group the cables on the floor together.

Finishes:

- matt white lacquer with tables in matt white
- matt black lacquer with tables in black, and turtledove.

#### Please note

Tense is recommended for indoor use, only.

The dimensional tolerance in both width and length is 0/+5mm.

**Please specify in the order if the tables would be eventually put close one another.**

Special sizes are not available

**For further information about specs, please refer to pricelist, section 8 tables of materials/colours.**

#### Monochromatic version (colour)




black


turtledove

NB: with the monochromatic version, there might be a slight difference in the tone between top and frame due to the variety of materials used: extra matt for the top, and acrylic resin and rock minerals for the legs/edge.


## TABLE standard version

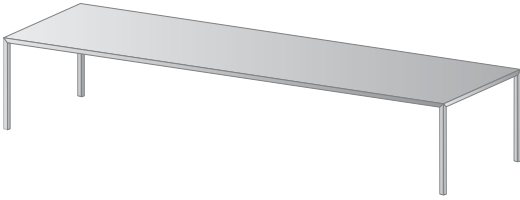


## TABLES with openings for cable (not available for the brass version)

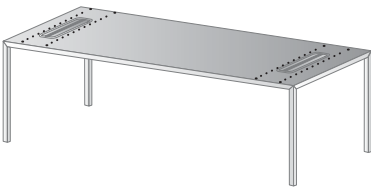


with one or two lateral openings for cable management in size 35 cm




with one central opening for cable management in size 42 cm

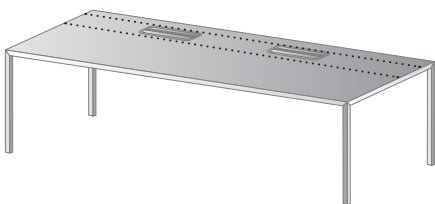


with two front openings for cable management in size 42 cm

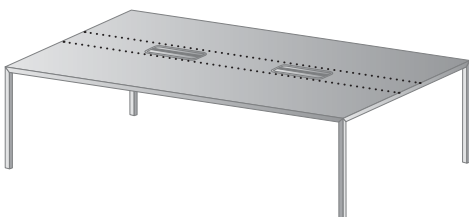


with two central openings for cable management in size 42 cm



Undertop cable tray

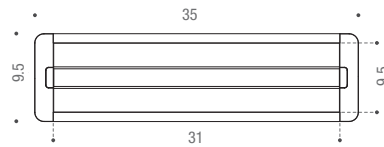

Opening for cable management in size 35 cm

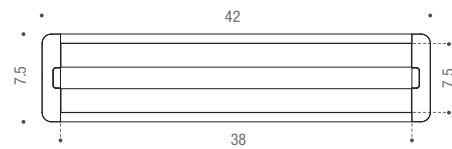


Opening for cable management in size 42 cm



# TENSE cable management door position


with one or two lateral openings for cable management in size 35 cm

X (cm)	Y (cm)
160	90
180	90
200	90
220	90
200	100
220	100

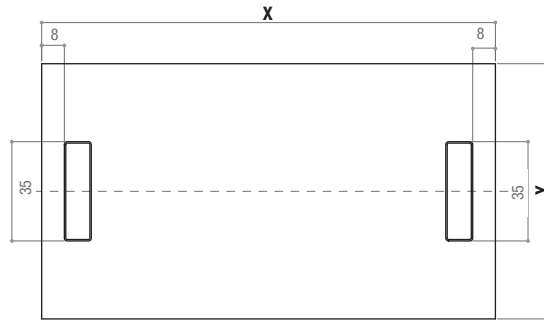

with one central opening for cable management in size 42 cm


X (cm)	Y (cm)
150	150
200	150
240	150

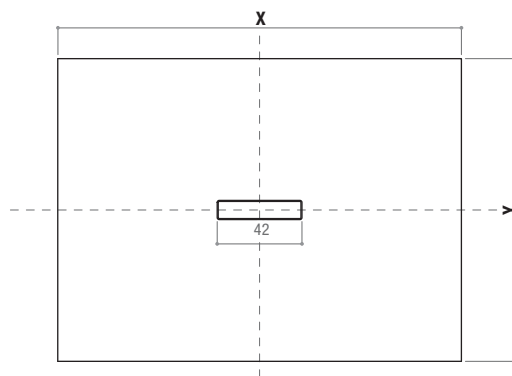

with two front openings for cable management in size 42 cm


X (cm)	Y (cm)	L (cm)
240	90	52
240	100	52
260	100	64
280	100	84
300	120	104
360	120	164
400	120	116

240	120	52
260	120	64
280	120	84
300	120	104
360	120	164
400	120	116

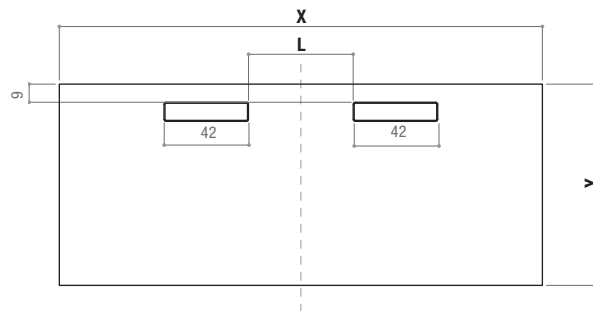

with two central openings for cable management in size 42 cm

X (cm)	Y (cm)	L (cm)
240	120	52
260	120	64
280	120	84
300	120	104
360	120	164
400	120	116
300	150	104
360	150	164
400	150	116

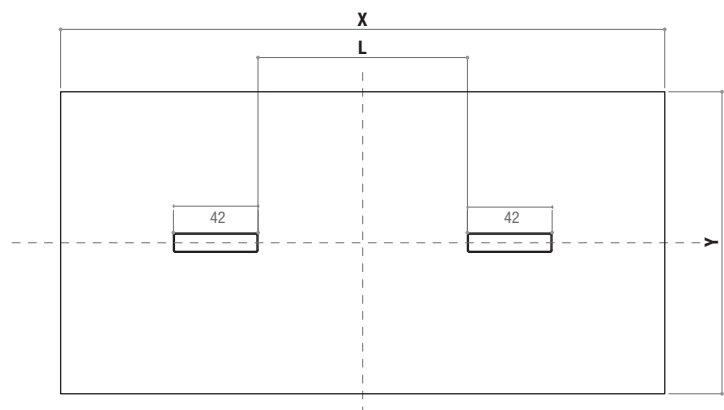

## ■ FENIX NTM® Grafo low table • Lim 3.0 • Extension

Fenix NTM is a newly-conceived material produced through thermo-lamination, the simultaneous application of heat (about 150°C) and specific high pressure (>7MPa): these factors allow to obtain, as end result, a homogeneous, non porous and high-density product. The core structure of FENIX NTM is composed of kraft paper impregnated with thermosetting resin. The external surface features a decorative paper obtained through new generation resins, capable of obtaining a high level of opacity. A property highlighted by the NTM Acronym: NanoTechMatt, i.e. matt effect enabled by nanotechnology. This special surface treatment makes sure the material has a high resistance to scratch and heat, soft touch, low light reflectivity, thermal healing of micro-scratches, enhanced anti-bacterial property, mould-resistant, hydro-repellent, high resistance to stains, acid solvents and household reagents, antistatic.

### Main features

- High resistance to scratch, abrasion and heat
- Anti-fingerprint
- Soft touch
- Low light reflectivity (extremely matt finish, a property highlighted by the NTM Acronym NanoTechMatt, i.e. matt effect enabled by nanotechnology)
- Thermal healing of micro-scratches
- Enhanced anti-bacterial property
- Mould-resistant
- Hydro-repellent
- High resistance to stains, acid solvents and household reagents
- Antistatic

## ■ KERAMIK Keramik • Desk

### TECHNICAL SPECIFICATIONS

Laminated ceramic features uniquely peculiar technical characteristics thanks to the innovative methods of ceramic treatment and production (laminated-porcelainized thin gres).

- Extreme surface hardness (comparable to topaz) and high bending strength.
- Resistant to stains, water, detergents and acids.
- Not inflammable, reaction to fire: class 0.
- Inalterability of the chromatic characteristics.
- It doesn't release toxic substances and there is no warping if heated with open flame

### CATAS TESTS PERFORMED ON CERAMIC

- fastness to light UNI 9427/89
- resistance to cold liquids EN 12720/97

- tendency to hold dirt UNI 9300/88 and FA276/89
- scratch resistance UNI9428/89
- reaction of surfaces to detergents PTP53/95

Other tests related to technical characteristics:

- fire resistance, wearproof, hardness resistance, abrasion resistance and water absorption resistance

**The material can have slight impurities, due to the particular production treatments, still accepted quality standards are complied with.**

## ■ EXTRA MATT LAMINATE Tense

EXTRA MATT interprets high-pressure stratified laminate in a new way. Compact and extra-thick, with mass coloration, it was developed to offer the finest characteristics that are typical of laminated products, with special emphasis on decorative appearance. Extra matt laminate features 3/5 gloss opaqueness with a satiny, silky feel and has a special surface treatment that eliminates the effect of sweaty, oily fingerprints to remain intact and stain-free.

Thanks to its great surface strength, it's suited for domestic usage, where special resistance to abrasion and scratching is especially needed.

### Main properties

- Resistant to scratching, abrasion and heat
- Resistant to dry heat
- Resistant to fingerprints
- Soft touch
- Unaffected by steam
- Stable when exposed to light
- Resistant to stains, and to domestic solvents and reagents

## ■ RESIN Desk • Ext-Table • Tense • T Table • Yale Low Table

### TECHNICAL SPECIFICATIONS

The resin is composed of natural minerals and very fine acrylic, mass-pigmented in white. The most advanced production process ensures the highest quality of the surface and high technical performance.

### Technical specs:

- It does not absorb: it is non-porous and extremely resistant to stains
- Its colour does not change over years
- It is ecological and hygienic thanks to the acrylic resin

- Easy to clean: no special care is required. For everyday cleaning, simply use a damp cloth and a soft cleanser. Stubborn stains, scratches and small cigarette burns can be removed with an abrasive creamy detergent.

## ■ HPL (mass colour) T Table

High pressure laminate (HPL) in thickness 10 mm, is composed of several layers of paper soaked in thermosetting resin and compacted in a heating- and high pressurizing process. The result is a stable product with physical and chemical characteristics that are very different from the elements used to make it. Due to the high temperature and pressure treatment in the production process, HPL is an extremely strong material: resistant to scratches, hits, abrasions, chemicals and heat.

### Maintenance:

HPL does not require any specific maintenance, only regular cleaning is suggested. The compact, non-porous surface can be easily cleaned and disinfected with warm water or steam and with all types of common detergents and disinfectants for home use, as long as they are not alkaline.

HPL is also very durable, therefore only a few precautions are necessary:

- avoid using strong acids or bases
- avoid rubbing the surface with very abrasive substances or tools (such as sandpaper or scour pads).

HPL is anti-static, and therefore does not attract dust. It does not require waxing or treatments with products containing wax. On the contrary, these products tend to form a sticky film on the surface which traps dirt.