
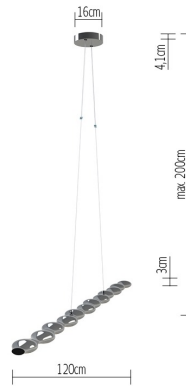


MOVE ALONG 12

KM00-0

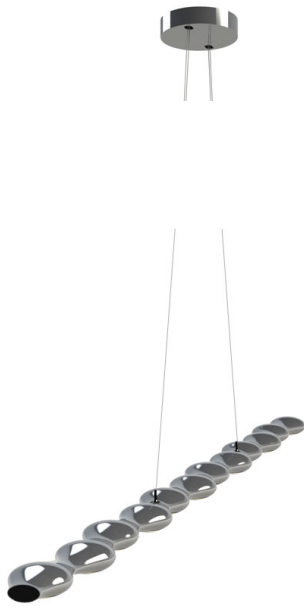

TECHNISCHE DATEN

Fassung / Leuchtmittel	LED
Montageart	Decken-/Wandaufbau
Lichtaustritt	direkt
Lichtverteilung	symmetrisch
Leuchtenbetriebswirkungsgrad	100 %
Lichtstrom (gesamt)	1400 lm
Farbtemperatur	2700 K
CRI	>90
Weißseindruck	warm white
Werkstoff des Gehäuses	Aluminium
Nennspannung von/bis	220-240 V
Netzfrequenz	50/60 Hz
Leistungsaufnahme	38 W
Betriebsgerät	Treiber
Schutzklasse	I
Dimmbar	Ja
Länge	120 mm
Pendellänge von/bis	-/2000 mm
Nettogewicht	0,00 kg
Brandschutz "F"	Ja

MOVE ALONG 12

KM00-0



TECHNICAL SPECIFICATIONS

Lamp holder	LED
Mounting method	surface-mounted
Light emission	direct
Light distribution	symmetric
Level of light output efficiency	100 %
Luminous flux (tot.)	1400 lm
Colour temperature	2700 K
CRI	>90
Housing material	Aluminium
Rated voltage (range)	220-240 V
Power frequency	50/60 Hz
Power consumption	38 W
Type of lamp control gear	Driver
Protection class	I
Dimmable	Yes
Length	120 mm
Suspension length	-/2000 mm
Net weight	0,00 kg
Fire protection "F"	Yes