# VIPP3 VIPP TOILET ROLL HOLDER

#### **DESIGNER**

Vipp Design Lab, 2008

#### COUNTRY OF ORIGIN

Design: Denmark Produced: Latvia assembly: Latvia

# PRODUCT DESCRIPTION

The Vipp toilet roll holder is made in solid stainless steel. The CNC cut steel ends are part of the discreet opening and closing mechanism, which ensures that the toilet roll can be easily replaced by simply lifting the cross bar. The rubber coated groove matches the towel bar, the hook and the shower shelf and creates a complete design look in the bathroom.








#### CARE INSTRUCTIONS

Stainless steel surfaces should be cleaned and polished with a microfiber cloth, glass cleaner or other non-abrasive and gentle cleaning agents.

Rubber parts should be cleaned with a moist cloth. Apply silicone spray for a better finish.

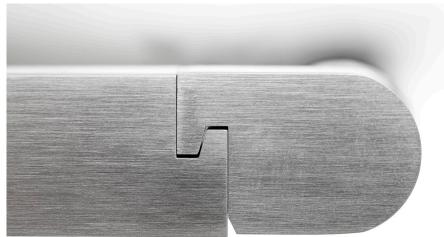

### WARRANTY

2 years warranty. The warranty pre supposes rightful use as described in Vipps care instructions, with reservations for normal wear and tear. Please see Vipps care instructions at www.vipp.com.

# VIPP3 VIPP TOILET ROLL HOLDER

#### **MATERIALS**

Polished Stainless steel (AiSi 304), Laser engraved logo

Rubber (Arnitel TPE EM 400) coated glass fiber reinforced polycarbonate (Xantar CF107)

#### **MANUFACTURING**

Stainless steel parts: CNC Milling, cutting and polishing

Rubber parts: Rubber overmoulded Plastic

# **DIMENSIONS & WEIGHT**

Width: 168 mm Depth: 84 mm Height: 75 mm Weight: 580 gram


# PRODUCT CERTIFICATION

**ROHS** Approved

#### PACKAGING/FSC

White gift box packaging

Height: 30 mm
Width: 108 mm
Length: 214 mm

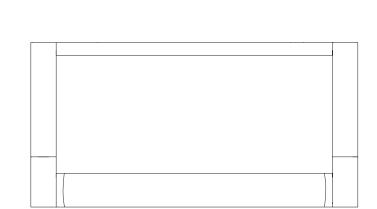





# VIPP3 **MOUNTING INSTRUCTIONS**

CITITITE DRILL SIZE

ø 6mm



DRILLING DISTANCE

120mm



**BRICK/CONCRETE RAWLPLUGS** 

Please make sure to choose rawlplugs according to the material on which you want to place the product. Substitute enclosed rawlplugs with another type if needed.

- 1 Drill holes and place rawlplugs.
- 2 Mount bushings using screws.
- 3 Loosen the integrated screw on the product with the allen wrench. Then place the product onto the bushings.
- 4 Tighten the integrated screw on the product with the allen wrench.

